

1. 샙크의 재료

S : 스틸 샙크

A : 절삭유 공급 스틸 샙크

X : 스페셜

2. 샙크의 지름

3. 공구의 길이

K	125	U	350
M	150	V	400
Q	180	W	450
R	200	Y	500
S	250	X	스페셜
T	300		

4. 클램핑 방식

P / 레버락

C / 톱 클램프

S / 스크류 클램프

M / 너티 락

W / 웨지 클램프

S 25 T - P C L N R - 16 - □

1 2 3 4 5 6 7 8 9 10

5. 인서트 형상

6. 공구의 형상

7. 인서트 여유각

8. 승수



우승수
*좌승수 인서트 사용

좌승수
*우승수 인서트 사용

9. 인선 길이

10. 옵션



필요시 정보 추가



규격	치수(mm)					인서트
	d	h	l	f	Dmin	
S32T PDUNR/L 15-D	32	30	300	22	40	DN... 1506 ...
S40T PDUNR/L 15-D	40	37	300	27	50	
S50U PDUNR/L 15-D	50	47	350	35	63	

홀더/ 인서트 사양	부품				
	레버	스크류	심	심 핀	렌치
S32T...15	DLC 4A	DLCS 4S	DLS-D 42	DSP 4	DHLW-3
S40T...15	DLC 4A	DLCS 4	DLS-D 42	DSP 4	DHLW-3
S50U...15	DLC 4A	DLCS 4	DLS-D 42	DSP 4	DHLW-3


사용 인서트 : 10쪽



규격	치수(mm)						인서트
	d	h	l	f	Dmin		
S25T PTFNR/L 16-D	25	23	300	17	32	TN... 1604 ...	
S32T PTFNR/L 16-D	32	30	300	22	40		

홀더/ 인서트 사양	부품					
	레버	스크류	심	심 핀	스냅 링	렌치
S25T...16	DLC 3BH	DLCS 3B	-	-	DLSR 3B	DHLW-2
S32T...16	DLC 3	DLCS 3	DLS-T 31.8	DSP 3A	-	DHLW-2.5



사용 인서트 : 13쪽

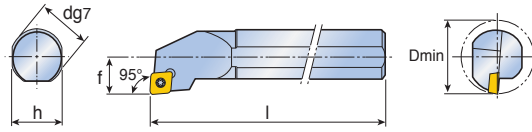

규격	치수(mm)						인서트
	d	h	l	f	Dmin		
S08K SCLCR/L 06-D	8	7	125	6	11		
S10K SCLCR/L 06-D	10	9	125	7	13		
S12M SCLCR/L 06-D	12	11	150	9	16		
S12M SCLCR/L 09-D	12	11	150	9	16		
S16R SCLCR/L 09-D	16	15	200	11	20		
S20S SCLCR/L 09-D	20	18	250	13	25		
S25T SCLCR/L 09-D	25	23	300	17	32	CC... 0602 ...	
						CC... 09T3 ...	

홀더/ 인서트 사양	부품	
	스크류	렌치
S08K,S10K...06	 DS 25050I	 DTFW-7
S12M...06	DS 25065I	DTFW-7
...09	DS 35080I	DTFW-15

사용 인서트 : 16, 21쪽





규격	치수(mm)					인서트
	d	h	l	f	Dmin	
S08K STFCR/L 09-D	8	7	125	6	11	 TC... 0902 ... <hr/> TC... 1102 ... <hr/> TC... 16T3 ...
S10K STFCR/L 09-D	10	9	125	7	13	
S12M STFCR/L 09-D	12	11	150	9	16	
S12M STFCR/L 1102-D	12	11	150	9	16	
S16R STFCR/L 1102-D	16	15	200	11	20	
S20S STFCR/L 1102-D	20	18	250	13	25	
S20S STFCR/L 16-D	20	18	250	13	25	
S25T STFCR/L 16-D	25	23	300	17	32	

홀더/ 인서트 사양	부품	
	스크류	렌치
S08K...09	 DS 22046I-TS	 DTFW-7
S10K, S12M...09	DS 22050I	DTFW-7
...11	DS 25065I	DTFW-7
S20S...16	DS 35080I	DTFW-15
S25T...16	DS 35080I	DTFW-15

사용 인서트 : 19, 23쪽

S-SVUBR/L





규격	치수(mm)	인서트					
		d	h	l	f	Dmin	
S32T	SVUBR/L 16-D	32	30	300	22	40	VB... 1604 ...
S40T	SVUBR/L 16-D	40	37	300	27	50	

홀더/ 인서트 사양	부품			
	스크류	심	심 스크류	렌치
...16	DS 35124I	DSS-V 32	DSC 50090S	DTFW-15

사용 인서트 : 20쪽

S-WTFNR/L



규격	치수(mm)	인서트					
		d	h	l	f	Dmin	
S25T	WTFNR/L 16-D	25	23	300	17	32	TN... 1604 ...
S32T	WTFNR/L 16-D	32	30	300	22	40	

홀더/ 인서트 사양	부품					
	웬지 클램프	스크류	스냅 링	심	핀 스크류	렌치
S25T...16	DWC 33	DWCS 4B	DWSR 4	-	DWSS 33-1	DHLW-3
S32T...16	DWC 33	DWCS 4	DWSR 4	DWS-T 33	DWSS 33	DHLW-3

사용 인서트 : 13쪽